


## Leak Testing the system

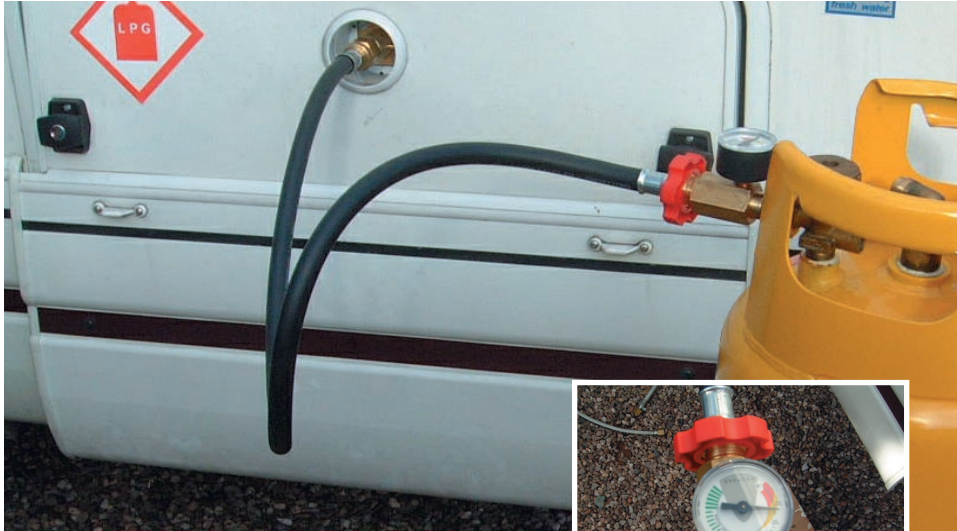

All systems must be leak tested. A Filling Kit has been designed and **MUST** be used to check the integrity of the filling installation.

### Using the Test Kit: Checking the Filling System...

- Connect the hose to the filler inlet.
- Connect the opposite end to a gas cylinder and turn on the gas supply. This will pressurise the empty cylinders and the connection hoses.
- Turn OFF the gas cylinder.
- Use the Gaslow leak detector fluid on all filler joints to locate any leaks. Do not solely rely on the pressure gauge to test for leaks.

### Now leak test the regulator outlet system...

Having tested the filling system, you can now use the cylinder pressure to test the regulator hose connections.

Switch ON the gaslow cylinder(s) and use Gaslow leak detection fluid to check all outlet connections.